



09/22/00

**UTILITY PATENT
APPLICATION TRANSMITTAL**(Only for new nonprovisional applications
under 37 CFR 1.53(b))

Attorney Docket No.

001168

Total Pages

First Named Inventor or Application Identifier

Takeo KOJIMA, Yoshihiro WATANABE and Fumihiro ITOH

Check Box, if applicable [] Duplicate

Express Mail Label No.

APPLICATION ELEMENTS FOR:
IMAGE FORMING APPARATUSADDRESS TO: Director of Patents and Trademarks
BOX PATENT APPLICATIONS
Washington, D.C. 202311. ☒ Fee Transmittal Form (Incorporated within this form)
(Submit an original and a duplicate for fee processing)2. ☒ Specification Total Pages [27]3. ☒ Drawing(s) (35 USC 113) Total Sheets [12]4. ☒ Oath or Declaration Total Pages [5]a. ☒ Newly executed (original)b. ☐ Copy from prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed).i. ☐ Deletion of Inventor(s)Signed statement attached deleting inventor(s) named in prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).☐ Incorporation by reference (useable if box 4b is checked)The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement Verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**8. ☒ Assignment Papers (cover sheet and document(s))9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)☒ Power of Attorney

**UTILITY PATENT
APPLICATION TRANSMITTAL**

(Only for new nonprovisional applications
under 37 CFR 1.53(b))

Attorney Docket No. **001168**

First Named Inventor or Application Identifier

Takeo KOJIMA, Yoshihiro WATANABE and Fumihiro ITOH

PAGE 2 OF 3

10. ☐ English translation Document (if applicable)

11. ☒ Information Disclosure Statement ☒ Copy of IDS Citation (PTO-1449 & 1 Ref.)

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired.

15. ☒ Claim for Convention Priority ☐ Certified copy of Priority Document

a. Priority of _____ application no. _____ filed on _____ is claimed under 35 USC 119.
The certified copies/copy have/has been filed in prior application Serial No. _____.
(For Continuing Applications, if applicable).

16. ☐ Other _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Division ☐ Continuation-in-part (CIP) of prior application no. ____/____

FEE TRANSMITTAL	Number Filed	Number Extra	Rate	Basic . . Fee
The filing fee is calculated below				\$690.00
Total Claims	6 - 20		x \$18.00	
Independent Claims	2 - 3		x \$78.00	
Multiple Dependent Claims			\$260.00	
Basic Filing Fee				\$ 690.00
Reduction by 1/2 for small entity				
Fee for recording enclosed Assignment			\$40.00	\$ 40.00
TOTAL				\$ 730.00

UTILITY PATENT
APPLICATION TRANSMITTAL

(Only for new nonprovisional applications
under 37 CFR 1.53(b))

Attorney Docket No.

001168

First Named Inventor or Application Identifier

Takeo KOJIMA, Yoshihiro WATANABE and Fumihiro ITOH

PAGE 3 OF 3

[XX] A check in the amount of \$ 730.00 is enclosed to cover the filing fee of \$ 690.00 and the assignment recordation fee of \$40.00.

[] Please charge our Deposit Account No. **01-2340** in the total amount of _____ to cover the filing fee and the _____ assignment recordation fee. A duplicate of this sheet is attached.

[XX] The Commissioner is hereby authorized to charge payment for any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Deposit Account No. **01-2340**. A duplicate of this sheet is attached.

18. CORRESPONDENCE ADDRESS

ARMSTRONG, WESTERMAN, HATTORI
MCLELAND & NAUGHTON
1725 K Street, N.W. Suite 1000
Washington, D.C. 20006
Telephone: (202) 659-2930
Facsimile: (202) 887-0357

SUBMITTED BY

Typed or Printed Name William L. Brooks

Reg. No. 34,129

Signature

William L. Brooks

Date: September 22, 2000

WLB/11

IMAGE FORMING APPARATUS

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 The present invention relates to an image forming apparatus used as a printer, and more particularly, to a lifespan management method for a plurality of components contained replaceably in an image forming apparatus.

2. Description of the Related Art

10 An image forming apparatus is a printing device, which performs printing by exposing an image to be printed onto an photosensitive drum, developing said image by adherence of toner, and then transferring the visible image to printing paper and fixing the image thereon. Moreover, in the case of color printing,
15 the respective steps described above are carried out for four toners of different colors, namely, Y (yellow), M (magenta), C (cyan) and K (black).

20 The aforementioned exposure and developing steps are carried out by means of a print unit installed replaceably in the image forming apparatus. This print unit comprises a photosensitive drum, and the like, and hence is a consumable part. Therefore, the lifespan thereof is managed, and when it reaches the end of its lifespan, the print unit must be replaced. Moreover, similar lifespan management is necessary for other
25 consumable parts (or components), such as toner cartridges contained inside the print unit, the fixing device and belts located outside the print unit, and the like.

002260-4749960

Conventionally, the lifespan of a component, such as a print unit, is managed by means of lifespan management information, such as a lifespan print copy number or lifespan time period, or the like, for each component, stored in a non-volatile memory (for example, an EEPROM,) in the image forming apparatus. Thereupon, when the number of printed copies reaches the lifespan number of copies, or when the operating time reaches the lifespan time period, a replacement indicator is displayed on the operating panel of the image forming apparatus, thereby prompting the user to replace the print unit.

Fig. 12 is a diagram for describing conventional lifespan management information for a component, as stored in a non-volatile memory. In Fig. 12, the non-volatile memory comprises lifespan management regions, namely: a total print number count region (1); a Y color print unit (PU) print number count region (2)-1; an M color PU print number count region (2)-2; a C color PU print number count region (2)-3; a K color PU print number count region (2)-4; a Y color toner cartridge (TC) print number count region (2)-5; an M color TC print number count region (2)-6; a C color TC print number count region (2)-7; a K color TC print number count region (2)-8; a fixing unit print number count region (2)-9; a belt print number count region (2)-10; and a respective color (Y, M, C, K) print position compensation value management region (3).

Each print number count region (2) comprises an upper region and N lower regions. Each of the lower regions is, for example, a region which counts from 0 to 10,000 copies, and when the number

of printed copies reaches 10,000, for instance, the count value of the lower region is reset to zero, whilst the count value of the upper region (including a back-up region) is incremented by +1. In other words, the count value of the upper region counts the 10,000 column, for instance. Moreover, the count up to 10,000 copies is performed in any one of the lower regions, and when the count value in that lower region reaches 10,000 copies, the adjacent lower region counts the next 10,000 copies. In this way, each time a count of 10,000 copies is made in one of the lower regions, the lower region performing the count is changed, in a successive fashion. In this way, in a non-volatile memory (EEPROM) which can only provide a rewriteable count value of the order of 10,000, it is possible to perform counts to a higher number than 10,000.

Furthermore, the lifespan copy numbers corresponding to each component are stored in a separate region of the EEPROM or a separate memory (ROM), or the like, and each time the number of printed copies corresponding to each component is counted, it is compared with the respective lifespan copy numbers.

However, by providing a plurality of lower regions, it becomes necessary to provide, for example, approximately several 10 bytes of memory for each print number count region (2). Therefore, since the non-volatile memory of the image forming apparatus comprises respective print number count regions (2) for each of a plurality of components, in total, a memory capacity of approximately several 100 to 1,000 bytes is required. Minimizing the size of the non-volatile memory

contained in an image forming apparatus would contribute to achieving cost reduction for the image forming apparatus.

SUMMARY OF THE INVENTION

5 Therefore, it is an object of the present invention to provide an image forming apparatus, wherein the lifespan of components can be managed by means of a non-volatile memory of the smallest possible capacity.

10 In order to achieve the aforementioned object, the image forming apparatus according to the present invention is, for example, an image forming apparatus replaceably containing a plurality of components; comprising: a non-volatile memory for storing a total print copy number (or total print time) updated each time a prescribed number of print copies are made (or each time a prescribed printing time period has elapsed), and a subsequent replacement schedule copy number (or replacement schedule time period) for each component; and a controller for judging the lifespan of each component on the basis of a comparison between the total print copy number (or total print time) and the subsequent replacement schedule copy number (or replacement schedule time period) of each component.

20 According to the present composition, a lifespan copy number (or lifespan time period) previously determined for each component is added to the replacement schedule copy number (or replacement schedule time period) for each respective component contained in an image forming apparatus, in other words, the total print number (or total printing time) at which the

component is replaced, and the resulting value is stored in a non-volatile memory. If the total print number (or total print time) has exceeded the replacement schedule copy number (or replacement schedule time period), then it is judged that the lifespan of the component has expired. In this way, since the amount of information required for managing the lifespan of components is reduced, it is possible to reduce the capacity of the non-volatile memory, and hence reduction in the cost of the image forming apparatus can be achieved.

When a component is replaced, the replacement schedule copy number (or replacement schedule time period) for that component, as stored in the aforementioned non-volatile memory, is updated by adding the previously determined lifespan copy number (or lifespan time period) for that component to the total print number (or total printing time) at which the component was replaced.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram illustrating an example of the internal composition of an image forming apparatus in an embodiment of the present invention;

Fig. 2 is a diagram illustrating a single print unit 20Y;

Fig. 3 is a control block diagram of an image forming apparatus in an embodiment of the present invention;

Fig. 4 is a diagram illustrating a method for counting the total print number;

Fig. 5 is a diagram illustrating the relationship between

the total print number and the lower region selected;

Fig. 6 is a diagram for explaining lifespan management information in an embodiment of the present invention;

Fig. 7 is a diagram illustrating a method for counting a replacement schedule copy number;

Fig. 8 is a flowchart of print processing in an embodiment of the present invention;

Fig. 9 is a flowchart of total print number update processing;

Fig. 10 is a flowchart of lifespan check processing;

Fig. 11 is a flowchart of replacement schedule copy number rewrite processing; and

Fig. 12 is a diagram illustrating conventional lifespan management information.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Below, embodiments of the present invention are described. However, the technical scope of the present invention is not limited to these embodiments.

Fig. 1 is a diagram illustrating an image forming apparatus according to the present embodiment. This image forming apparatus 10 is constituted by a full-color printer. The image forming apparatus 10 has a frame 12, which comprises a top cover 14 and a rear cover (not illustrated). Fig. 1 shows a state wherein the top cover 14 is opened slightly with respect to the frame 12. By opening the top cover 14 and/or the rear cover, it is possible to access the inner components of the image forming

apparatus 10 (for example, the print unit).

In Fig. 1, the image forming apparatus 10 comprises four print units 20B, 20C, 20M, 20Y aligned in a linear fashion. An endless printing paper conveyor belt 22 is provided with respect to the four print units 20B, 20C, 20M, 20Y. The printing paper conveyor belt 22 is made from a suitable synthetic resin material, and it passes around the circumferences of four rollers 24a, 24b, 24c and 24d. Roller 24a is a drive roller, which also functions as an AC charge removing roller for removing electrical charge from the printing paper conveyor belt 22. Roller 24b is an idle roller, which also functions as a charging roller for applying electrical charge to the printing paper conveyor belt 22. Rollers 24c and 24d are both guide rollers. Roller 24d is a tension roller for applying suitable tension to the printing paper conveyor belt 22.

A hopper 26 is provided beneath the printing paper conveyor belt 22. A stack of printing paper P is stored in a hopper 26. The printing paper P is pulled out from the hopper 26, one sheet at a time, by a pick-up roller 28, and conveyed to the printing paper conveyor belt 22 by a paper feed roller 30. The printing paper P is then transferred by the printing paper conveyor belt 22 to the print units 20B, 20C, 20M, 20Y, where it is printed or marked. The printed paper P is then conveyed to a fixing unit 32, and subsequently discharged via appropriate guide rollers (not illustrated) to a stacker formed on the upper face of the top cover 14.

Since the printing paper conveyor belt 22 is charged by the

002260-472960

idle roller 24b, the printing paper P is attracted to, and held on, the printing paper conveyor belt 22, electrostatically, when it is introduced onto the printing paper conveyor belt 22 from side adjacent to the idle roller 24b. Thereby, the printing paper P is held in a uniform position on the printing paper conveyor belt 22. On the other hand, since the drive roller 24a also functions as a charge removing roller, when the printing paper P passes the position of the drive roller 24a, the electrical charge is removed and the printing paper P can be separated readily from the printing paper conveyor belt 22 when discharged on the side adjacent to the driver roller 24a, without wrapping around into the lower portion of travel of the printing paper conveyor belt 22.

The four print units 20Y, 20M, 20C, 20B each respectively have the same structure, and respectively contain developers having a yellow toner component, a magenta toner component, a cyan toner component, and a black toner component. Consequently, these print units 20Y, 20M, 20C, 20B respectively print a yellow toner image, magenta toner image, cyan toner image and black toner image onto the printing paper P held and moved by the printing paper conveyor belt 22, and in combination, they form a full-color toner image.

Fig. 2 is a diagram illustrating one print unit 20Y. The print unit 20Y comprises a photosensitive drum 36, a pre-charging unit 38, an optical head (LED beam scanner) 40, a developer 42, a transfer roller 44, and a toner cleaning unit 46.

002250-4T223950

The pre-charging unit 38 is constituted, for example, by a brush charging unit, roller charging unit, or corona charging unit, and by means of this pre-charging unit 38, a uniform electrical charge is imparted successively to the surface of the photosensitive drum 36. The optical head 40 is disposed to the rear of the pre-charging unit 38 and it writes an electrostatic latent image onto the charged region of the photosensitive drum 36, by means of an LED beam. In other words, the LED beam flashes on and off on the basis of image data obtained from a computer, word processor, or the like, and thereby, an electrostatic latent image is written onto the drum in the form of a dot image.

The electrostatic latent image written onto the photosensitive drum 36 is developed electrostatically in the form of a charged toner image, by means of toner of the prescribed color in the developer unit 42. Thereupon, the electrostatic toner image is transferred electrostatically onto the printing paper P by means of a transfer element 44 positioned below the photosensitive drum 36. The transfer element 44 is constituted by a conductive transfer roller made from a porous body (sponge). This transfer element 44 presses against the photosensitive drum 36 via the printing paper conveyor belt 22, and it supplies an electrical charge of reverse polarity to the charged toner image, onto the printing paper P conveyed by the printing paper conveyor belt 22, thereby causing the charged toner image on the photosensitive drum 36 to be transferred electrostatically onto the printing paper 36.

002260-4729960

The printing paper P onto which the electrostatic toner image has been transferred is then separated from the printing paper conveyor belt 22 and fed to a fixing unit 32. Incidentally, after completion of image transfer to the printing paper P, there remains toner adhering to the surface of the photosensitive drum 36 which has not been transferred to the printing paper P. This residual toner is removed by means of a toner cleaning unit 46. The residual toner thus removed is recovered by means of a conveyor screw and hose mechanism (not illustrated).

When the developing unit 42 is installed in the device, the surface of the developing roller 52, in other words, the sleeve thereof, confronts the surface of the body carrying the electrostatic latent image on the photosensitive drum 36. The lower portion of the print unit 20Y forms a developer storage region, and a reset roller 54 is provided therein. The reset roller 54 is driven and rotated in the direction indicated by the arrow in the diagram, when the developing unit 42 operates. The reset roller 54 recovers developer which has not been supplied completely to the photosensitive drum 36 and remains on the developer roller 52.

Moreover, by rotation of the developer roller 52, the developer is conveyed to the surface region confronting the photosensitive drum 36, in other words, the developing region. In order to restrict the amount of developer conveyed to the developer region by the developer roller 52 to a prescribed amount, a developer restricting blade (not illustrated) is attached in a position opposing the developer roller 52.

002260-4729960

In the developing unit 42, if, for example, the toner is charged with a negative electrical charge, then a uniform negative charge region is formed on the rotating surface of the photosensitive drum 36 by means of the pre-charging unit 38.

5 When the pre-charged region of the photosensitive drum 36 is illuminated by the LED beam emitted by the optical head 40, the negative electrical charge is removed from the points that are illuminated, thereby forming potential differences. In other words, an electrostatic latent image is written onto the charged
10 region of the photosensitive drum 36, in the form of potential differences. For example, supposing that the electrical potential of the charged region of the photosensitive drum 36 is -600V, the electrical potential of the electrostatic latent image would be reduced to approximately -50V. On the other hand,
15 a negative developing bias voltage of -400V, for example, is applied to the developer roller 52, and hence an electric field is created between the developer roller 52 and the photosensitive drum 36. Due to the electric field between the developer roller 52 and the photosensitive drum 36, the
20 negatively charged toner moves towards the photosensitive drum 36, and adheres to the photosensitive drum 36, thereby developing the image.

Consequently, as illustrated in Fig. 1, by introducing the printing paper P into the printing region from the region of
25 the idle roller 24b of the belt conveying means 22, and then passing it successively by the print units 20Y, 20M, 20C and 20B, toner images of four colors are superimposed mutually on

the printing paper P, thereby forming a full-color image. The printing paper P is subsequently transferred from the drive roller 24a side of the belt conveying means 20 towards the fixing roller 32 formed by a heating roller, whereby the color image is fixed by heating to the printing paper P.

The optical head 40 is attached to the top cover 14. Furthermore, the printing paper conveyor belt 22 and the rollers 24a - 24d are formed integrally as a belt unit, and the transfer element 44 is attached to this belt unit.

Fig. 3 is a control block diagram of the image forming apparatus according to an embodiment of the present invention. In Fig. 3, the MPU 101 of the main unit control circuit 100 of the image forming apparatus 10 reads out a program and data stored in a ROM 102, and controls each section of the device in accordance with the aforementioned program. For example, the MPU 101 controls operations such as reading and writing to the RAM 103, reading and writing to the EEPROM 104, reading of sensors (not illustrated), motor driving, communication with a panel control unit 110 via a communications circuit 107, and the like. An operating panel 111 is connected to the panel control unit 110. The RAM 103 stores data required when executing the program.

The EEPROM 104 is a non-volatile memory for storing data written even when the power switch is OFF. In the embodiment of the present invention, it stores data such as lifespan management information, and the like, for the components. A motor control circuit 105 drives a supply motor, drum motor and cooling fan, on the basis of the control implemented by MPU 101.

Under the control of the MPU 101, an output port 106 controls on/off switching of a high-voltage power supply 109 for supplying high voltage in order to perform operations, such as pre-charging, developing, transfer, and the like, in the print unit 20, and it also controls on/off switching of the optical head 40 and the fixing unit 32. A plurality of sensors connected to the sensor input circuit 108 (not illustrated) detect information such as the presence or absence of printing paper, the passage of printing paper on the printing paper conveyance path, opening and closing of the cover, removal of a print unit 20, the temperature of the fixing unit 32, and the like.

Fig. 4 is a diagram illustrating a method for counting the total number of print copies. In Fig. 4, symbol M is the number counted in a lower region, and it may be any value that is smaller than the rewriteable control value of the EEPROM, for instance, 10000. Moreover, the symbol N is the number of lower regions, which is, for instance, 16. The following processing steps are carried out, each time one printed copy is counted.

(1) A lower region is selected according to the remainder resulting when the upper region 1 for the total print number count is divided by N.

(2) The selected lower region is incremented by +1.

(3) It is determined whether or not the count value of the selected lower region is M, and if it has indeed reached M, then the value of that lower region is reset to '0', and the upper regions 1, 2, 3 are incremented by +1.

Fig. 5 is a diagram illustrating the relationship between

the total number of printed copies and the lower region selected. As shown in the diagram, by means of the processing described above, when the number of printed copies is 0 to $M-1$, lower region 0 is selected, when it is between M and $M \times 2 - 1$, lower region 1 is selected, ..., and when it is between $M \times (N-1)$ and $M \times N - 1$, lower region $N-1$ is selected. Moreover, once $M \times N$ copies has been reached, the count returns again to lower region 0.

Returning to Fig. 4, Fig. 4(a) illustrates an initial state where the total number of printed copies is zero. The count value in the upper regions 1, 2, 3 (upper regions 2 and 3 being back-up regions) is '0', and the count value in the lower region 0 is also '0'. Fig. 4(b) shows a state where the total number of printed copies is 1. Here, the upper region 1 is '0', and '1' has been counted in the lower region 0. Fig. 4(c) shows a state where the total number of printed copies is $M-1$. Here, the upper region 1 is still '0', and the count of the lower region 0 is 'M-1'. Fig. 4(d) shows a state where the total number of printed copies is M . Since the count value of the lower region has reached M , upper regions 1, 2, 3 count '1', and the lower region 0 is reset to '0'. Fig. 4(e) shows a state where the total number of printed copies is $M \times N - 1$. The lower region selected in this state is the lower region $N-1$ corresponding to the result $N-1$ obtained when the total print number of $M \times N - 1$ is divided by M . Therefore, the count value of the upper regions is 'N-1' and the count value of the lower region $N-1$ is 'M-1'. Fig. 4(f) shows a state where the total number of printed copies is $M \times N$. The count value of the upper regions counts up to 'N' and the lower

region N-1 is reset to 0.

Fig. 6 is a diagram for describing lifespan management information in an embodiment of the present invention. In Fig. 6, the non-volatile memory (EEPROM) 104 comprises a lifespan management region, consisting of a subsequent replacement schedule copy number region (4) for each component and a total print number count region (1), and a compensation value management region (3). The total print number count region (1) depicted here is similar to the composition in the total printed copy number count region (1) shown in Fig. 12. In other words, the total print number count region (1) comprises upper regions 1, 2, 3 and N lower regions 1 to N-1. The upper regions 2, 3 in the total print number count region (1) are back-up regions. Moreover, in the diagram, the subsequent replacement schedule copy number regions (4)-1 to 10 for various components, such as the Y color print unit (PU), M color PU, C color PU, K color PU, Y color toner cartridge (TC), M color TC, C color TC, K color TC, fixing unit, belt, and the like, each respectively comprise upper regions 1, 2 and lower regions 1, 2. In each case, the upper region 2 and lower region 2 are back-up regions.

The copy number scheduled for next replacement of a component is written into the respective replacement schedule copy number region (4). For example, if the lifespan copy number of a print unit is 30,000 copies, initially, since the total printed copy number is '0', the value '30000' is written into the PU replacement schedule copy number region. Thereupon, when the total printed copy number reaches 30,000, it is judged that

the lifespan of the print unit has expired. Subsequently, when the print unit has been replaced, the total printed copy number at the time of replacement is added to the replacement schedule copy number for the print unit, and the resulting value (for example, if the print unit is exchanged at 30,100 copies, then $30,100 + 30,000 = '60,100'$) is overwritten as the subsequent replacement schedule copy number. Thereupon, when the total printed copy number reaches 60,100, it is again judged that the lifespan of the print unit has expired.

In this way, in the present embodiment, in place of the print number count region (2) having a relatively large volume, a replacement schedule copy number region (4) having a relatively small volume is used. More specifically, whereas a conventional lifespan management region for each component might use, for example, 19 unit regions of 16 byte capacity, in the present embodiment, only four such regions are required. A 'unit region' is a general term for an individual upper region or lower region. Consequently, since the capacity of the EEPROM used to record lifespan management information can be reduced, this contributes to reducing the cost of an image forming apparatus.

The lifespan management method adopted in the present embodiment is now described in more detail.

Fig. 7 is a diagram describing a count method for a replacement schedule copy number. Fig. 7(a) shows an initial state where the total print number is zero. Here, the total print number is '0'. Moreover, taking the lifespan copy number of the toner cartridge (TC) as 'Y', and the lifespan copy number of

the print unit (PU) as 'Z', the value resulting from adding 'Y' to the total print number '0', namely, 'Y', is set in the toner cartridge replacement schedule copy number region, and the value resulting from adding 'Z' to the total print number '0', namely, 'Z', is set in the replacement schedule copy number region of the print unit.

Fig. 7(b) shows a state where the total print number is 1, and Fig. 7(c) shows a state where the total print number is X, which is a smaller value than 'Y' or 'Z'. Fig. 7(d) shows a state where the total print number has reached Y. In this state, a toner cartridge replacement indicator is displayed on the operating panel.

Fig. 7(e) is a diagram showing a state where the toner cartridge has been replaced. Since the toner cartridge is replaced when the total print number is $Y + \alpha$, the value ('Y + α ' + 'Y') is overwritten in the replacement schedule copy number region for the toner cartridge. Moreover, Fig. 7(f) is a diagram showing a state where the print unit has been replaced. If the print unit is replaced, when the total print number is 'Z + β ', which exceeds the lifespan copy number of the print unit, then the value ('Z + β ' + 'Z') is overwritten in the replacement schedule copy number region for the print unit.

Fig. 8 is a flowchart of print processing in an embodiment of the present invention. When the power supply is turned on, firstly, at step S101, the main unit control circuit 100 is initialized (reset). At step S102, check tests are carried out for the ROM 102 and RAM 103. Thereupon, at step S103, a test

of the EEPROM 104 in the main unit control circuit 100 is carried out. At step S104, initial processing is executed. Initial processing involves processing such as rotating the motor and supplying high-voltage power to the print unit 20.

5 Upon receipt of a print request from the host device at step S105, it is determined, at step S106, whether the device is already engaged in print processing, in other words, whether or not continuous printing is to be performed. If continuous printing is not involved, then at step S107, print start-up
10 processing is implemented. In print start-up processing, for example, the print unit 20 is driven and the fixing unit 32 is heated up.

At step S108, a sheet of paper is picked up from the paper supply unit. When the paper has started to travel at step S109,
15 update processing is carried out for the total print number in the EEPROM 104 of the main unit control device 100, at step S110. Thereupon, at step S111, lifespan check processing is carried out. Details of total print number update processing and lifespan check processing are described below.

20 At step S112, if there is a further print request, then steps S105 to S111 described above are repeated. If there is no print request at step S112, then the printing operation terminates at step S113.

Fig. 9 is a flowchart of update processing for the total
25 print number. At step S201, firstly, the value of the upper region of the total print number count region is divided by the number of lower regions N, and the remainder from this calculation is

taken as A. At step S202, the A_{th} lower region is selected and the count value of this region is set as B. At step S203, the count value B is incremented by +1. At step S204, it is judged whether the +1 incremented count value B is greater than the upper count limit M for the lower region (for example, 10,000).
5 If the value is less than M, then at step S209, the +1 incremented count value B is written into the A_{th} lower region. If the value is equal to or above M, then at step S205, the count value B in the A_{th} lower region is reset to '0', and the value A is
10 incremented by +1. At step S206, it is determined whether the +1 incremented value A is equal to or greater than the number N of lower regions. If the value is less than N, then the adjacent $A+1_{th}$ lower region is selected. At step S209, the +1 incremented count value B is written into the A_{th} lower region. If the value
15 is equal to or above B, then at step S207, value A is reset to '0', whilst the count value of the upper region is incremented by +1. Thereupon, at step S209, the +1 incremented count value B is written into the A_{th} lower region.

By means of this update processing, each time that one of
20 the lower regions counts up to its upper count limit, the lower region counting the print number is shifted to the adjacent lower region. Moreover, if the lower region is shifted, then the count value of the upper region is also incremented.

Fig. 10 is a flowchart of lifespan check processing. The
25 components may be subjected to the lifespan check processing described below, in any desired sequence. At step S301, firstly, the lifespan of the Y color print unit (PU) is checked. In other

words, it is determined whether or not the total print number has reached the Y color PU replacement schedule copy number. If the replacement schedule copy number has been reached, then at step S302, the Y color PU replacement request flag is set to '1', and a replacement indicator is displayed on the operating panel. If the total print number is less than the replacement schedule copy number, then at step S303, the lifespan of the Y color toner cartridge (TC) contained in the Y color PU is checked. In other words, it is judged whether or not the total print number has reached the Y color TC replacement schedule copy number. If the replacement schedule copy number has been reached, then at step S304, the Y color TC replacement request flag is set to '1', and a replacement indicator is displayed on the operating panel. If the total print number is less than the replacement schedule number, then lifespan check processing similar to that described above is carried out respectively for the M color, C color and K color print units (steps S305 to S308). When a print unit is replaced, since the toner cartridge is also replaced together with the print unit, it is not necessary to carry out a toner cartridge lifespan check, when the print unit replacement request flag is set.

Following the print units and toner cartridges, lifespan check processing is conducted in a similar fashion for the fixing unit (steps S309, S310), whereupon lifespan check processing for the belt (steps S311, S312) is carried out.

Fig. 11 is a flowchart of replacement schedule copy number rewrite processing. This processing sequence is carried out when

002260"442960

a component is replaced. Fig. 11 is a flowchart of PU replacement schedule copy number rewrite processing corresponding to replacement of a print unit (PU), for example. At steps S401 and S402, the Y color PU replacement request flag and the Y color TC replacement request flag are respectively reset to '0'.
5 Thereby, the replacement indicator displayed on the operating panel is cancelled. At step S403, the count value C in the upper region of the total print number count region at the time of the replacement is read out, along with the count value D in
10 the lower region thereof. At step S404, the print unit lifespan copy number is added to the count value C, D at the time of replacement. Specifically, of the lifespan copy number, the value of the columns exceeding the upper count limit M is added to count value C (the resulting value being called value E),
15 and the value of the columns equal to or lower than the upper count value M are added to count value D (the resulting value being called value F). For example, if the lifespan copy number of a print unit is 35,000 and the upper count limit M of the lower region is 10,000, then $E = C + 3$, and $F = D + 5000$.

20 At step S405, it is determined whether or not value F is equal to or greater than the upper count limit M. If it is equal to or greater than M, then at step S406, value E is incremented by +1, and value F is reduced by value M. If value E is less than value M, then the sequence proceeds to step S407. At step
25 S407, it is determined that value E is a value corresponding to the upper region of the replacement schedule copy number for the Y color PU, and that value F is a value corresponding to

the lower region thereof, these values being written to the corresponding regions of the EEPROM 104. Moreover, processing similar to that described above is also carried out with respect to the Y color TC replacement schedule copy number. In other words, by adding the Y color lifespan copy number to the total print number values C, D at the time of replacement, a count value G corresponding to the upper region of the subsequent Y color TC replacement schedule copy number and a count value H corresponding to the lower region thereof are determined and written into the EEPROM 104 (step S408 to S412). Moreover, processing similar to that described above is also carried out with respect to the M color, C color and K color print units and toner cartridges, and the fixing unit and belt.

In the present embodiment of the invention, each time that a print is made, the count value of the EEPROM 104 is updated by +1, but it is also possible to update the count value by more than one, each time a certain number of prints have been made.

Moreover, in the present embodiment of the invention, the lifespan of each component is judged on the basis of the number of printed copies, but instead of this, it is also possible to judge lifespan on the basis of printing time. Specifically, it is possible to use 'total printing time' and 'replacement schedule time' in place of 'total print number' and 'replacement schedule copy number'. The scheduled replacement time is obtained by adding a lifespan time period previously determined for each component, to the total printing time at the point of replacement. Thereupon, the total printing time is updated after

each passage of a prescribed printing time period, and the lifespan of each component is judged. The prescribed printing time period may be, for example, the period of time taken by the photosensitive drum to rotate through a prescribed angle.

5 The relationship between the print number and printing time is virtually proportional, but this proportional relationship varies with the size of the printing paper. This is because the printing time for a single sheet of paper varies with the size of the paper. Consequently, in an image forming apparatus
10 capable of printing onto a plurality of paper sizes, it is possible to achieve more accurate lifespan judgement using print number, than lifespan judgement based on printing time.

 Furthermore, lifespan judgement based on print number and lifespan judgement based on printing time may also be used in
15 parallel. In this case, it is possible to adopt a system, whereby a replacement indicator is displayed on the operating panel if either method indicates that a component lifespan has been reached, or a replacement indicator is displayed on the operating panel if both methods indicate that a lifespan has
20 been reached.

 The scope of the present invention is not limited to the embodiment described above, and it also extends to the inventions described in the claims and equivalents to same.

 According to the present invention described above, a
25 lifespan copy number (lifespan time period) previously determined for each component is added to the replacement schedule copy number (replacement schedule time) of respective

components contained in an image forming apparatus, in other words the total print number (total print time) at the time of replacement of a component, and the resulting value is recorded in a non-volatile memory. Thereupon, it is judged that a
5 component lifespan has expired, each time that the total print number (total print time) exceeds the replacement schedule copy number (replacement schedule time period). Thereby, since the amount of information required for component lifespan management is small, the capacity of the non-volatile memory
10 can be reduced, and hence cost reductions in the image forming apparatus can be achieved.

What Is Claimed Is:

1. An image forming apparatus replaceably containing a plurality of components; comprising:

5 a non-volatile memory for storing a total print copy number updated each time a prescribed number of print copies are made, and a subsequent replacement schedule copy number for each component; and

10 a controller for judging the lifespan of each component on the basis of a comparison between said total print copy number and said subsequent replacement schedule copy number of each component.

2. The image forming apparatus according to claim 1,
15 wherein, when one of the components is replaced, the subsequent replacement schedule copy number for said component as stored in said non-volatile memory is updated to a value obtained by adding a lifespan copy number previously determined for said component to the total print copy number at the time of
20 replacement.

3. An image forming apparatus replaceably containing a plurality of components; comprising:

25 a non-volatile memory for storing a total printing time updated each time a prescribed printing time period has elapsed, and a subsequent replacement schedule time period for each component; and

a controller for judging the lifespan of each component on the basis of a comparison between said total printing time and said subsequent replacement schedule time period of each component.

5

4. The image forming apparatus according to claim 3, wherein, when one of the components is replaced, the subsequent replacement schedule time period for said component as stored in said non-volatile memory is updated to a value obtained by adding a lifespan time period previously determined for said component to the total printing time at the time of replacement.

10

5. The image forming apparatus according to claim 1, wherein said component is a print unit, a toner cartridge, a fixing unit, or a belt.

15

6. The image forming apparatus according to claim 3, wherein said component is a print unit, a toner cartridge, a fixing unit, or a belt.

ABSTRACT

In a image forming apparatus, a lifespan copy number (lifespan time period) previously determined for each component is added to the replacement schedule copy number (replacement schedule time) of respective components contained in the apparatus, in other words the total print number (total print time) at the time of replacement of a component, and the resulting value is recorded in a non-volatile memory. Therefore, it is judged that a component lifespan has expired, each time that the total print number (total print time) exceeds the replacement schedule copy number (replacement schedule time period). Thereby, since the amount of information required for component lifespan management is small, the capacity of the non-volatile memory can be reduced, and hence cost reductions in the image forming apparatus can be achieved.

FIG. 1

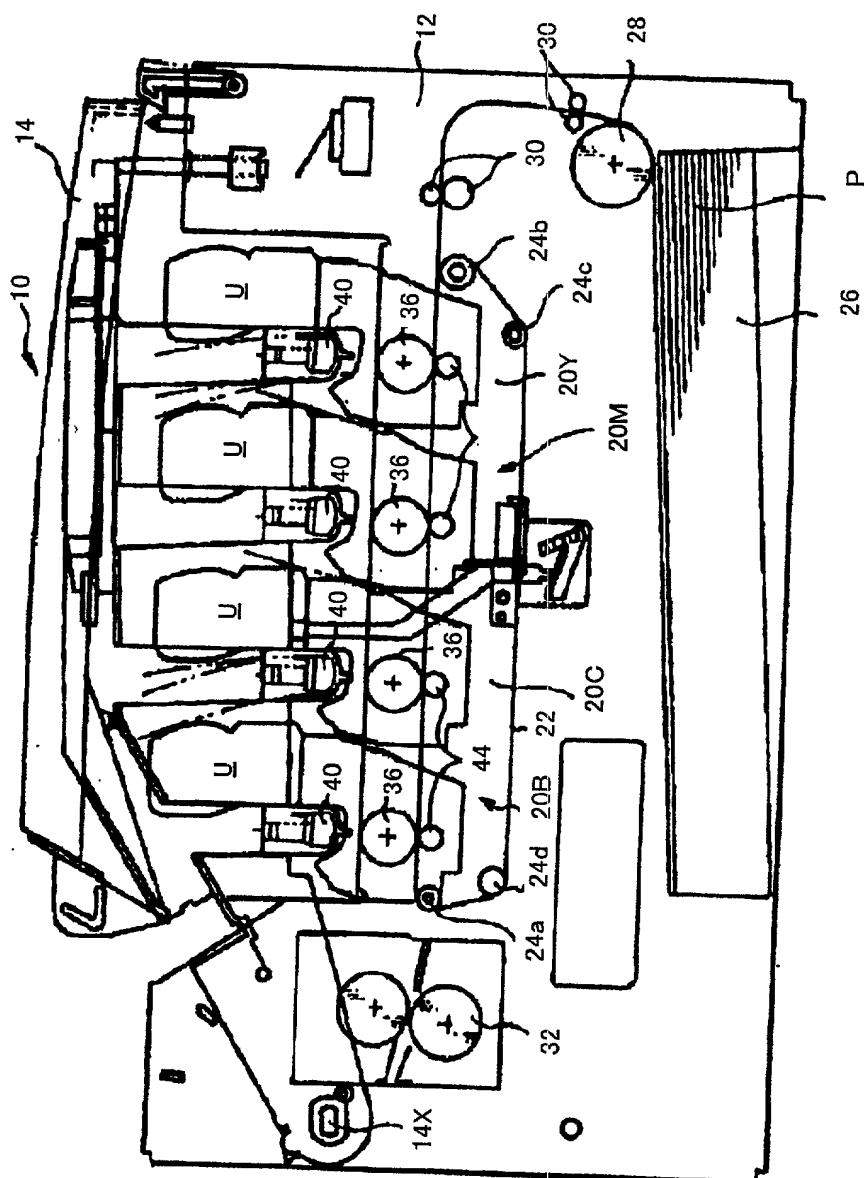


FIG. 2


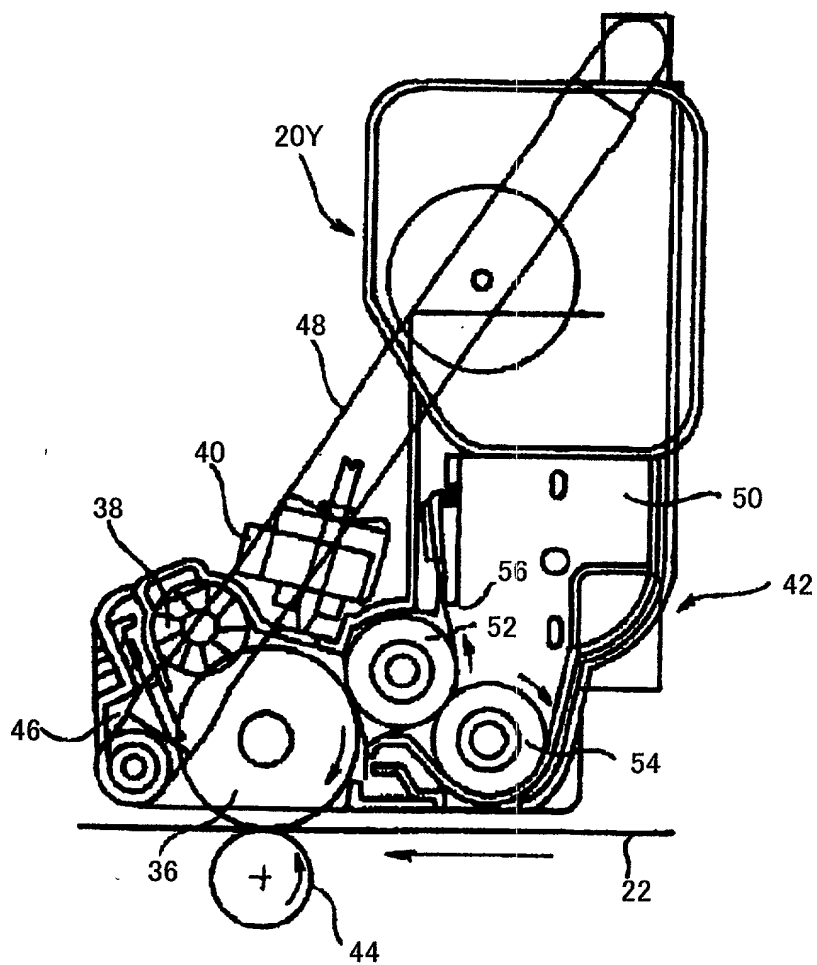


FIG. 3

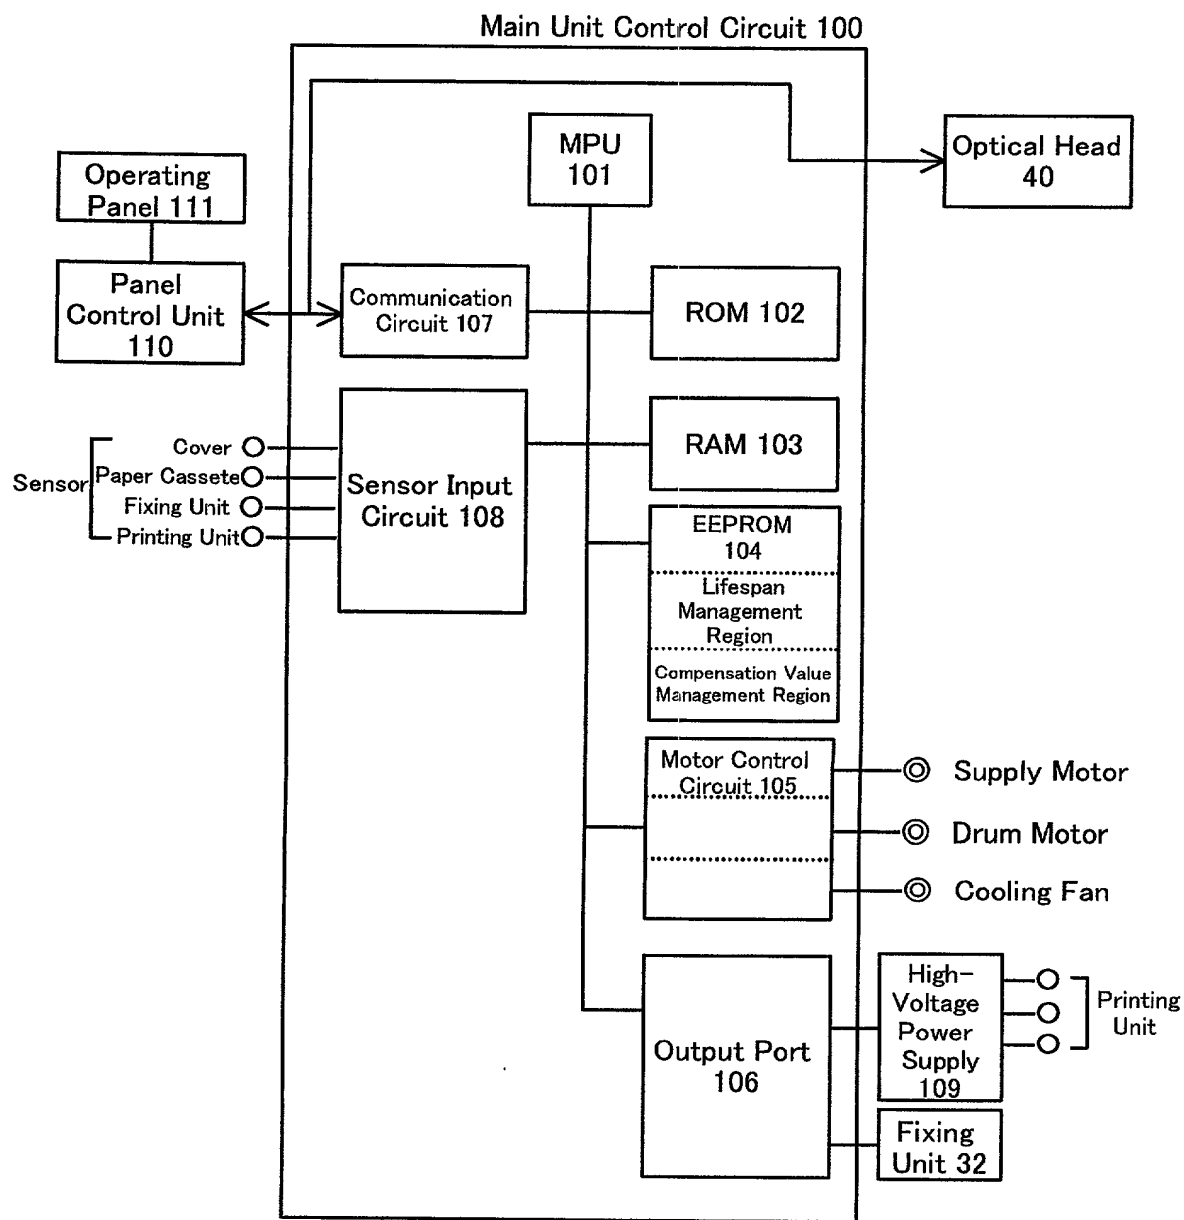

Initial ($0 \times M + 0$)

	Value
Total Print Number Count (Upper) 1	<u>0</u>
Total Print Number Count (Upper) 2	0
Total Print Number Count (Upper) 3	0
Total Print Number Count (Lower) 0	0
Total Print Number Count (Lower) 1	0
:	
Total Print Number Count (Lower) N	0

FIG. 4A

After Printing One Copy ($0 \times M + 1$)

	Value
Total Print Number Count (Upper) 1	<u>0</u>
Total Print Number Count (Upper) 2	0
Total Print Number Count (Upper) 3	0
Total Print Number Count (Lower) 0	1
Total Print Number Count (Lower) 1	0
:	
Total Print Number Count (Lower) N	0

FIG. 4B

After Printing M-1 Copies ($0 \times M + (M-1)$)

	Value
Total Print Number Count (Upper) 1	<u>0</u>
Total Print Number Count (Upper) 2	0
Total Print Number Count (Upper) 3	0
Total Print Number Count (Lower) 0	<u>M-1</u>
Total Print Number Count (Lower) 1	0
:	
Total Print Number Count (Lower) N	0

FIG. 4C

After Printing M Copies ($1 \times M + 0$)

	Value
Total Print Number Count (Upper) 1	<u>1</u>
Total Print Number Count (Upper) 2	1
Total Print Number Count (Upper) 3	1
Total Print Number Count (Lower) 0	0
Total Print Number Count (Lower) 1	<u>0</u>
:	
Total Print Number Count (Lower) N	0

FIG. 4D

After Printing $N \times M - 1$ Copies

	Value
Total Print Number Count (Upper) 1	<u>N-1</u>
Total Print Number Count (Upper) 2	N-1
Total Print Number Count (Upper) 3	N-1
Total Print Number Count (Lower) 0	0
Total Print Number Count (Lower) 1	0
:	
Total Print Number Count (Lower) N	<u>M-1</u>

FIG. 4E

After Printing $N \times M$ Copies

	Value
Total Print Number Count (Upper) 1	<u>N</u>
Total Print Number Count (Upper) 2	N
Total Print Number Count (Upper) 3	N
Total Print Number Count (Lower) 0	<u>0</u>
Total Print Number Count (Lower) 1	0
:	
Total Print Number Count (Lower) N	0


FIG. 4F

002260-1749960

13462
13463
13464
13465
13466
13467
13468
13469
13470
13471
13472
13473
13474
13475
13476
13477
13478
13479
13480
13481
13482
13483
13484
13485
13486
13487
13488
13489
13490
13491
13492
13493
13494
13495
13496
13497
13498
13499
13500
13501
13502
13503
13504
13505
13506
13507
13508
13509
13510
13511
13512
13513
13514
13515
13516
13517
13518
13519
13520
13521
13522
13523
13524
13525
13526
13527
13528
13529
13530
13531
13532
13533
13534
13535
13536
13537
13538
13539
13540
13541
13542
13543
13544
13545
13546
13547
13548
13549
13550
13551
13552
13553
13554
13555
13556
13557
13558
13559
13560
13561
13562
13563
13564
13565
13566
13567
13568
13569
13570
13571
13572
13573
13574
13575
13576
13577
13578
13579
13580
13581
13582
13583
13584
13585
13586
13587
13588
13589
13590
13591
13592
13593
13594
13595
13596
13597
13598
13599
13600
13601
13602
13603
13604
13605
13606
13607
13608
13609
13610
13611
13612
13613
13614
13615
13616
13617
13618
13619
13620
13621
13622
13623
13624
13625
13626
13627
13628
13629
13630
13631
13632
13633
13634
13635
13636
13637
13638
13639
13640
13641
13642
13643
13644
13645
13646
13647
13648
13649
13650
13651
13652
13653
13654
13655
13656
13657
13658
13659
13660
13661
13662
13663
13664
13665
13666
13667
13668
13669
13670
13671
13672
13673
13674
13675
13676
13677
13678
13679
13680
13681
13682
13683
13684
13685
13686
13687
13688
13689
13690
13691
13692
13693
13694
13695
13696
13697
13698
13699
13700
13701
13702
13703
13704
13705
13706
13707
13708
13709
13710
13711
13712
13713
13714
13715
13716
13717
13718
13719
13720
13721
13722
13723
13724
13725
13726
13727
13728
13729
13730
13731
13732
13733
13734
13735
13736
13737
13738
13739
13740
13741
13742
13743
13744
13745
13746
13747
13748
13749
13750
13751
13752
13753
13754
13755
13756
13757
13758
13759
13760
13761
13762
13763
13764
13765
13766
13767
13768
13769
13770
13771
13772
13773
13774
13775
13776
13777
13778
13779
13780
13781
13782
13783
13784
13785
13786
13787
13788
13789
13790
13791
13792
13793
13794
13795
13796
13797
13798
13799
13800
13801
13802
13803
13804
13805
13806
13807
13808
13809
13810
13811
13812
13813
13814
13815
13816
13817
13818
13819
13820
13821
13822
13823
13824
13825
13826
13827
13828
13829
13830
13831
13832
13833
13834
13835
13836
13837
13838
13839
13840
13841
13842
13843
13844
13845
13846
13847
13848
13849
13850
13851
13852
13853
13854
13855
13856
13857
13858
13859
13860
13861
13862
13863
13864
13865
13866
13867
13868
13869
13870
13871
13872
13873
13874
13875
13876
13877
13878
13879
13880
13881
13882
13883
13884
13885
13886
13887
13888
13889
13890
13891
13892
13893
13894
13895
13896
13897
13898
13899
13900
13901
13902
13903
13904
13905
13906
13907
13908
13909
13910
13911
13912
13913
13914
13915
13916
13917
13918
13919
13920
13921
13922
13923
13924
13925
13926
13927
13928
13929
13930
13931
13932
13933
13934
13935
13936
13937
13938
13939
13940
13941
13942
13943
13944
13945
13946
13947
13948
13949
13950
13951
13952
13953
13954
13955
13956
13957
13958
13959
13960
13961
13962
13963
13964
13965
13966
13967
13968
13969
13970
13971
13972
13973
13974
13975
13976
13977
13978
13979
13980
13981
13982
13983
13984
13985
13986
13987
13988
13989
13990
13991
13992
13993
13994
13995
13996
13997
13998
13999
14000

Print Number	Total Print Number Counter (Lower)							
	0	1	2	3	4	5	~	N-1
$M \times 0 \sim M \times 1 - 1$	○							
$M \times 1 \sim M \times 2 - 1$		○						
$M \times 2 \sim M \times 3 - 1$			○					
$M \times 3 \sim M \times 4 - 1$				○				
$M \times 4 \sim M \times 5 - 1$					○			
$M \times 5 \sim M \times 6 - 1$						○		
~							~	
$M \times (N-1) \sim M \times N - 1$								○
$M \times N \sim M \times (N+1) - 1$	○							
$M \times (N+1) \sim M \times (N+2) - 1$		○						
$M \times (N+2) \sim M \times (N+3) - 1$			○					
$M \times (N+3) \sim M \times (N+4) - 1$				○				
$M \times (N+4) \sim M \times (N+5) - 1$					○			
$M \times (N+5) \sim M \times (N+6) - 1$						○		
~							~	
$M \times (N+N-1) \sim M \times (N+N) - 1$								○
$M \times (N+N) \sim M \times (N+N+1) - 1$	○							

FIG. 6

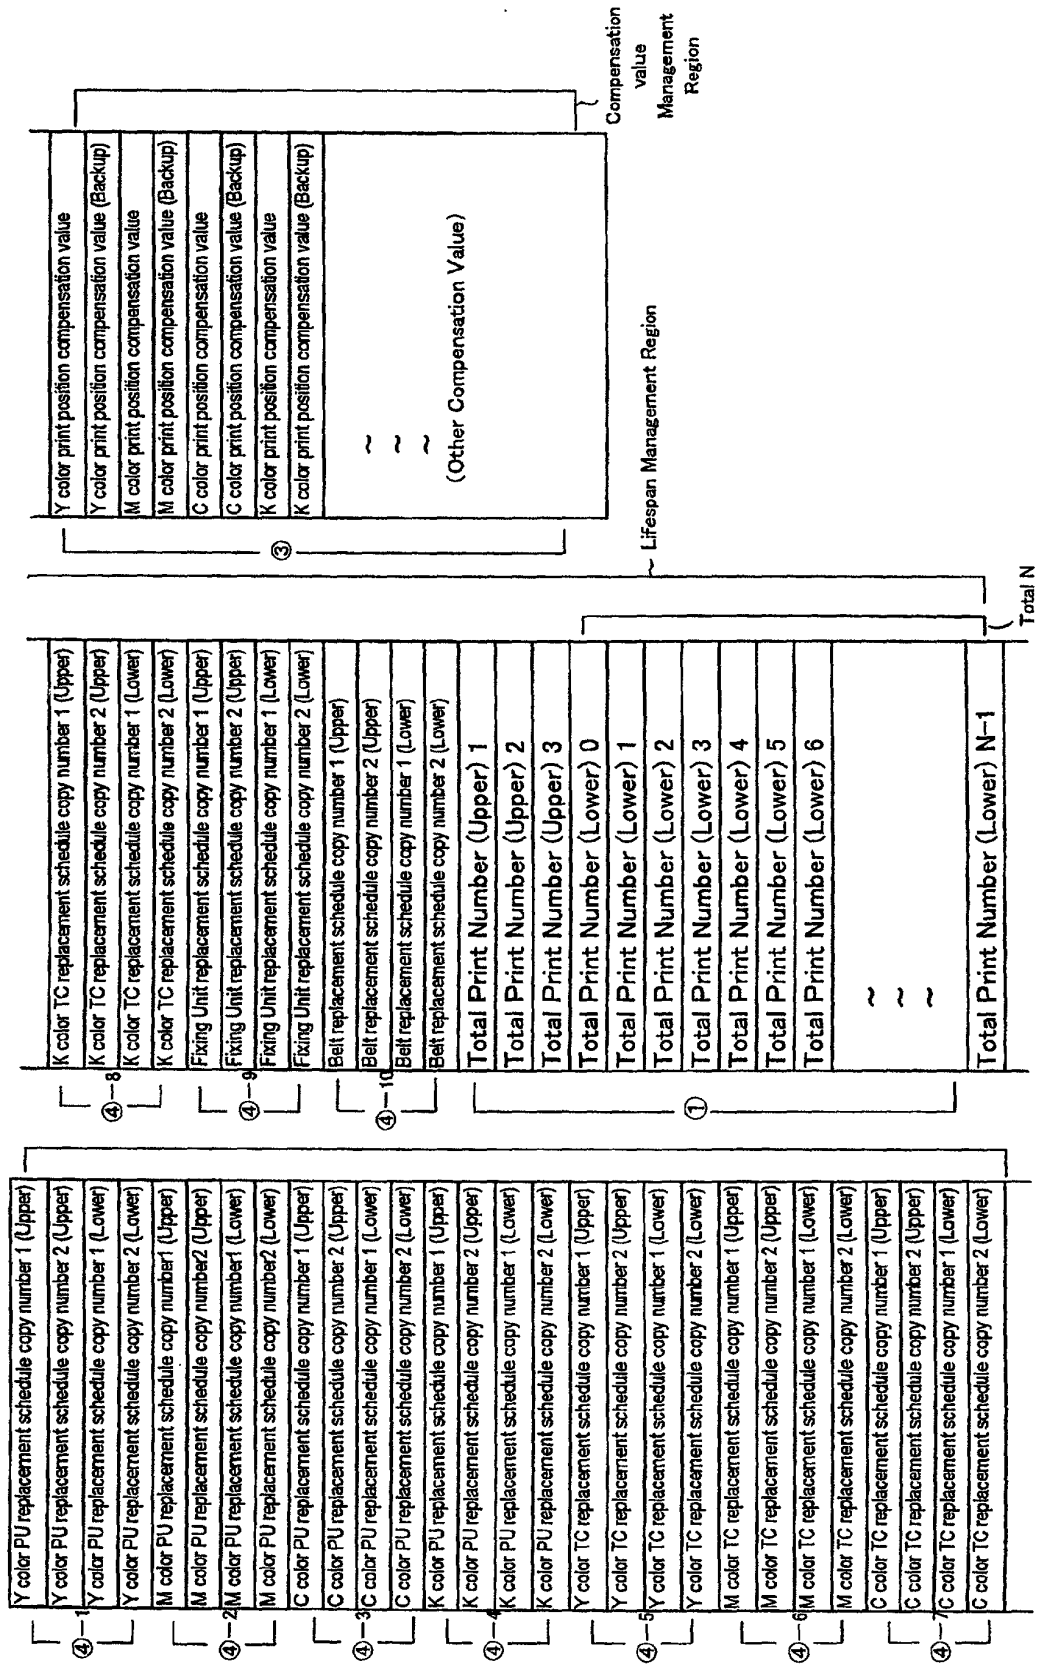

EEPROM (Initial)

	Value
Total Print Number Count 1	0
Total Print Number Count 2	0
TC Replacement Schedule Copy Number 1	Y
TC Replacement Schedule Copy Number 2	Y
PU Replacement Schedule Copy Number 1	Z
PU Replacement Schedule Copy Number 2	Z

FIG. 7A

EEPROM (After Printing One Copy)

	Value
Total Print Number Count 1	1
Total Print Number Count 2	1
TC Replacement Schedule Copy Number 1	Y
TC Replacement Schedule Copy Number 2	Y
PU Replacement Schedule Copy Number 1	Z
PU Replacement Schedule Copy Number 2	Z

FIG. 7B

EEPROM (After Printing X Copies)

	Value
Total Print Number Count 1	X
Total Print Number Count 2	X
TC Replacement Schedule Copy Number 1	Y
TC Replacement Schedule Copy Number 2	Y
PU Replacement Schedule Copy Number 1	Z
PU Replacement Schedule Copy Number 2	Z

FIG. 7C

EEPROM (After Printing Y Copies)

	Value
Total Print Number Count 1	Y
Total Print Number Count 2	Y
TC Replacement Schedule Copy Number 1	Y
TC Replacement Schedule Copy Number 2	Y
PU Replacement Schedule Copy Number 1	Z
PU Replacement Schedule Copy Number 2	Z

FIG. 7D

EEPROM (After Replacing TC)

	Value
Total Print Number Count 1	$Y + \alpha$
Total Print Number Count 2	$Y + \alpha$
TC Replacement Schedule Copy Number 1	$Y + \alpha + Y$
TC Replacement Schedule Copy Number 2	$Y + \alpha + Y$
PU Replacement Schedule Copy Number 1	Z
PU Replacement Schedule Copy Number 2	Z


FIG. 7E

EEPROM (After Printing M Copies and Replacing PU)

	Value
Total Print Number Count 1	$Z + \beta$
Total Print Number Count 2	$Z + \beta$
TC Replacement Schedule Copy Number 1	$Y + \alpha + Y$
TC Replacement Schedule Copy Number 2	$Y + \alpha + Y$
PU Replacement Schedule Copy Number 1	$Z + \beta + Z$
PU Replacement Schedule Copy Number 2	$Z + \beta + Z$


FIG. 7F

FIG. 8

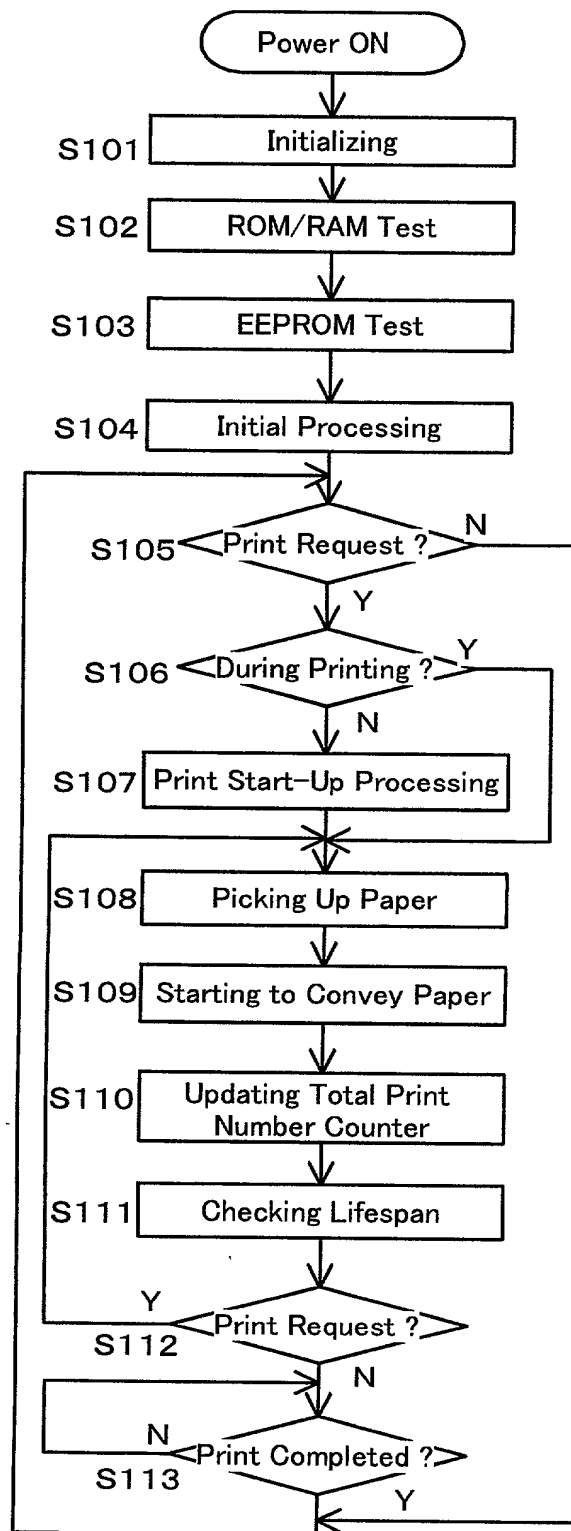

002260-4T/9960

FIG. 9

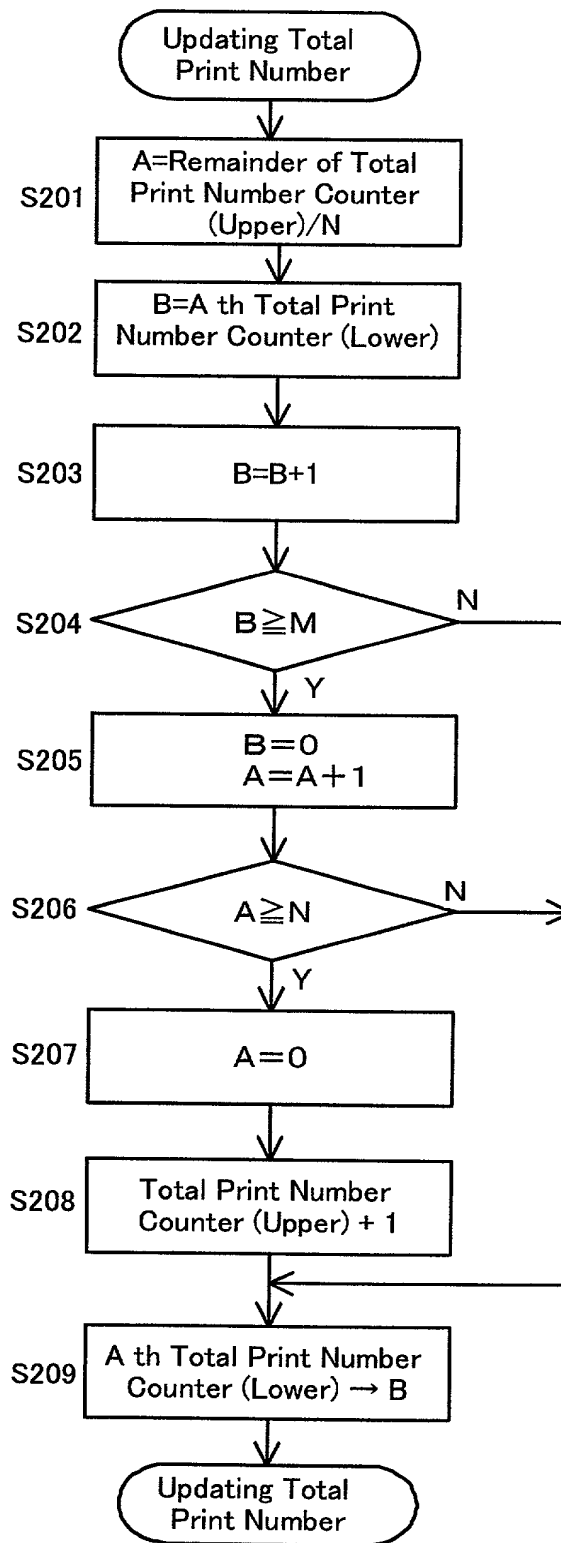

002260" 4T 229960

FIG. 10


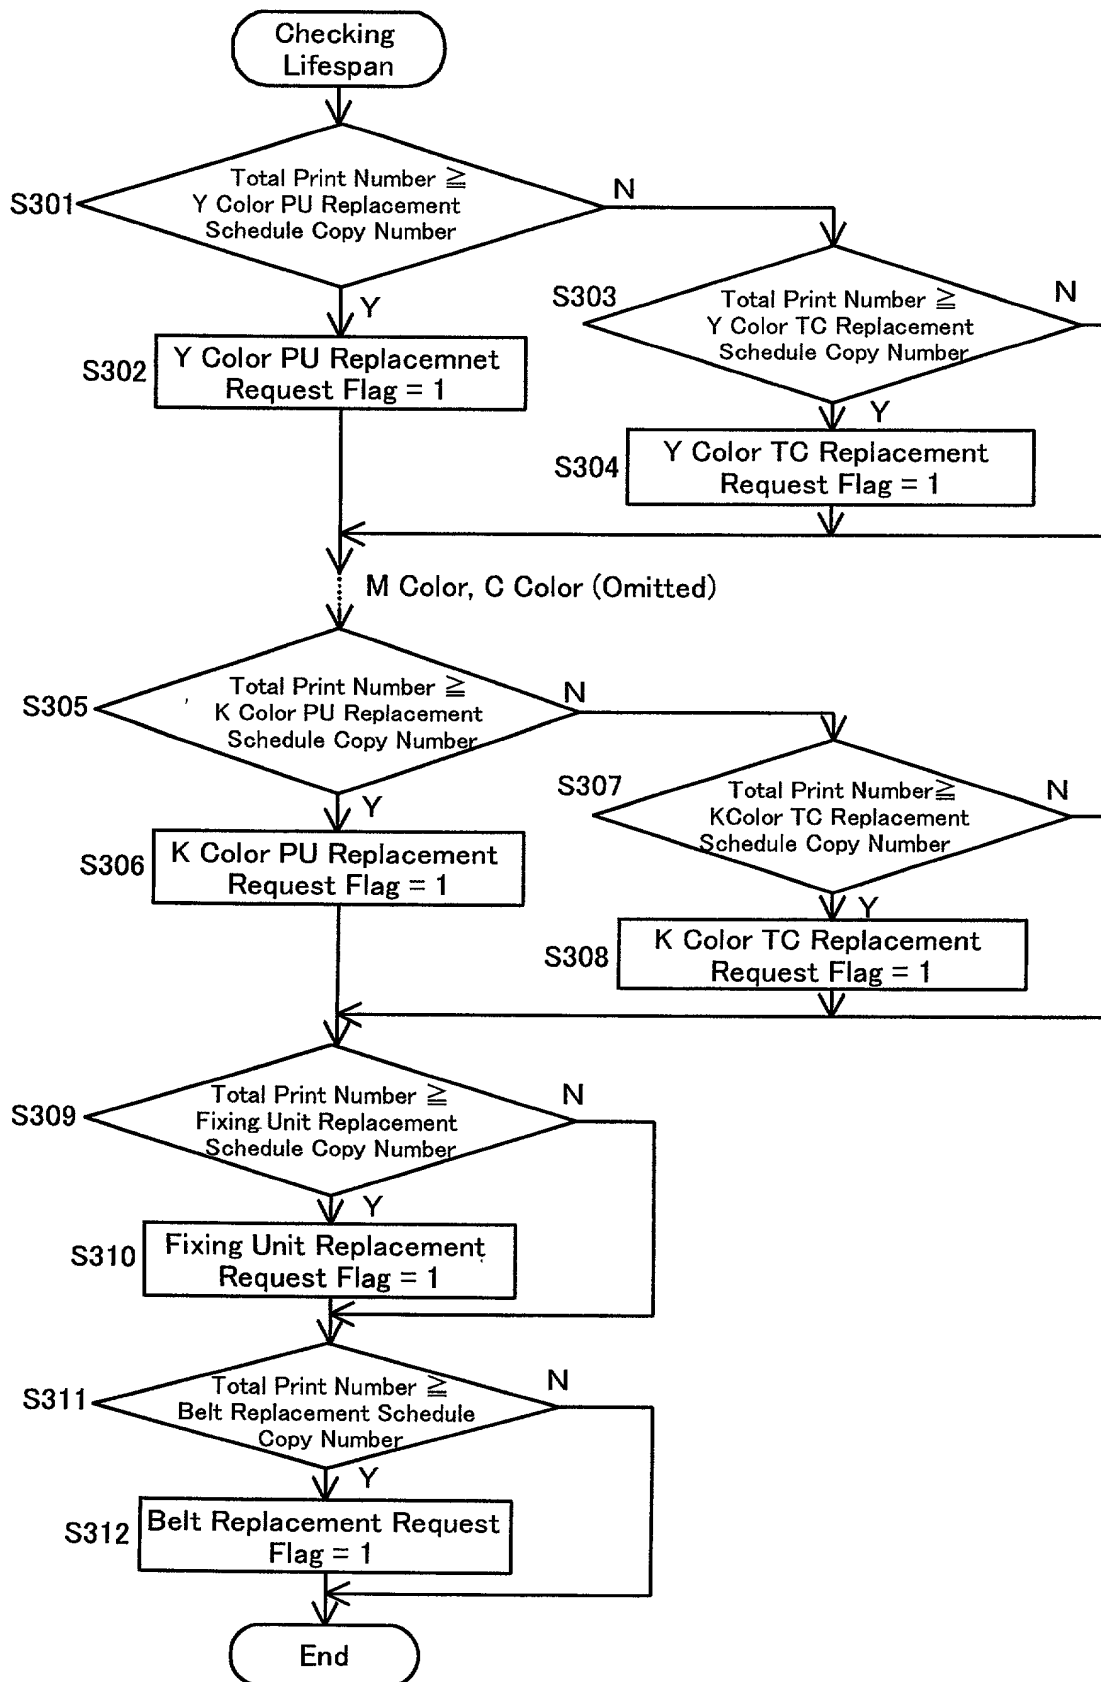


FIG. 11

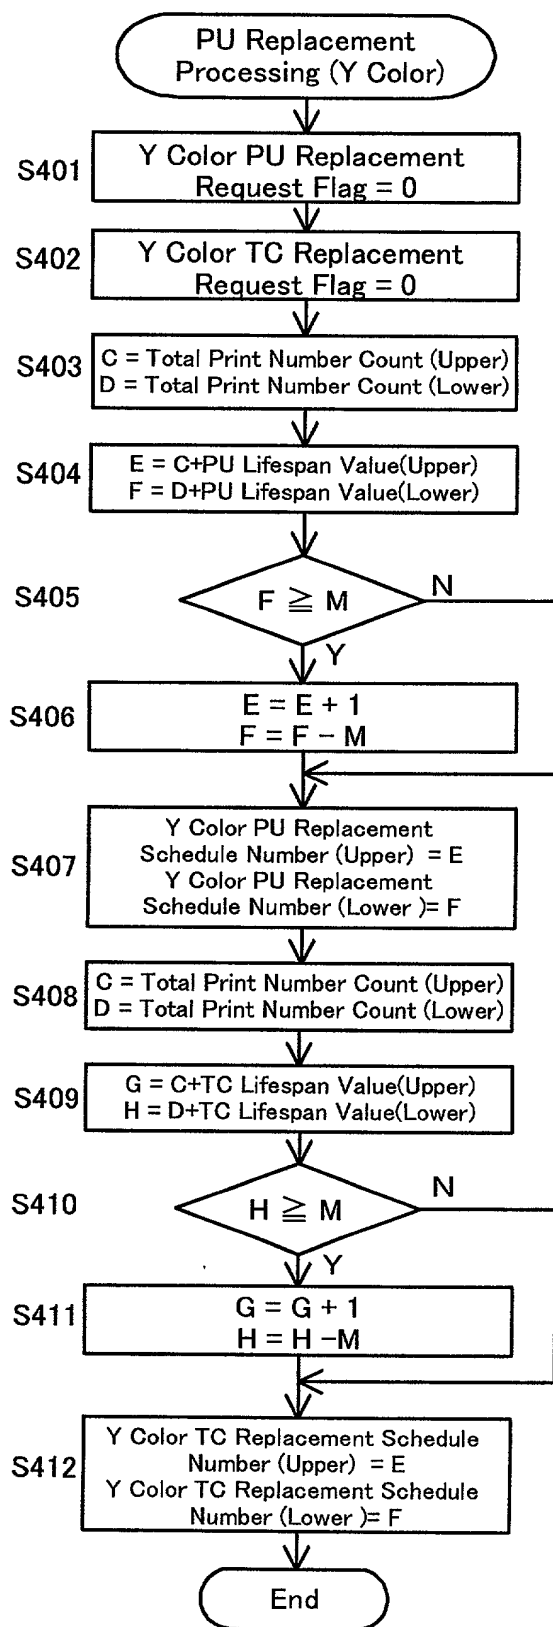

002260-4T2960

Declaration and Power of Attorney for U.S. Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE FORMING APPARATUS

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
（該当する場合）____に訂正されました。☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on _____
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願
11-311308

(Number)
(番号)

Japan

(Country)
(国名)

01/11/1999

(Day/Month/Year Filed)
(出願年月日)

Priority Not Claimed

優先権主張なし

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願年月日)

☐

私は、第35編米国法典119条(e)項に基づいて下記の米国外の特許出願規定に記載された権利をここに主張いたします。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外の特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外の特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)
(出願番号)

(Filing Date)
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration
(日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)
See list of attorneys and/or agents on page 5.

書類送付先

Send Correspondence to:

ARMSTRONG, WESTERMAN, HATTORI,
McLELAND & NAUGHTON
1725 K Street, N.W., Suite 1000
Washington, D.C. 20006

直接電話連絡先： (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Telephone: (202) 659-2930 Fax: (202) 887-0357

唯一または第一発明者名	Full name of sole or first inventor Takeo KOJIMA		
発明者の署名	日付	Inventor's signature Takeo Kojima	Date 05/09/2000
住所	Residence Kawasaki, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		
第二共同発明者	Full name of second joint inventor, if any Yoshihiro WATANABE		
第二共同発明者	日付	Second inventor's signature Yoshihiro Watanabe	Date 05/09/2000
住所	Residence Kawasaki, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki, 211-8588 Japan		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

第三共同発明者		Full name of third joint inventor, if any	
Fumihito ITOH			
第三発明者の署名	日付	Third inventor's signature	Date
		<i>Fumihito Itoh</i>	05/09/2000
住所	Residence		
	Kawasaki, Japan		
国籍	Citizenship		
	Japan		
私書箱	Post Office Address		
	c/o FUJITSU LIMITED, 1-1, Kamikodanaka		
	4-chome, Nakahara-ku, Kawasaki,		
	211-8588 Japan		
第四共同発明者		Full name of fourth joint inventor, if any	
第四発明者の署名	日付	Fourth inventor's signature	Date
住所	Residence		
国籍	Citizenship		
私書箱	Post Office Address		
第五共同発明者		Full name of fifth joint inventor, if any	
第五発明者の署名	日付	Fifth inventor's signature	Date
住所	Residence		
国籍	Citizenship		
私書箱	Post Office Address		
第六共同発明者		Full name of sixth joint inventor, if any	
第六発明者の署名	日付	Sixth inventor's signature	Date
住所	Residence		
国籍	Citizenship		
私書箱	Post Office Address		

List of attorneys and/or agents

James E. Armstrong, III, Reg. No. 18,366; William F. Westerman, Reg. No. 29,988; Ken-Ichi Hattori, Reg. No. 32,861; Le-Nhung McLeland, Reg. No. 31,541; Ronald F. Naughton, Reg. No. 24,616; John R. Pegan, Reg. No. 18,069; William G. Kratz, Jr., Reg. No. 22,631; James P. Welch, Reg. No. 17,379; Albert Tockman, Reg. No. 19,722; Mel R. Quintos, Reg. No. 31,898; Donald W. Hanson, Reg. No. 27,133; Stephen G. Adrian, Reg. No. 32,878; William L. Brooks, Reg. No. 34,129; John F. Carney, Reg. No. 20,276; Edward F. Welsh, Reg. No. 22,455; Patrick D. Muir, Reg. No. 37,403; Gay A. Spahn, Reg. No. 34,978; John P. Kong, Reg. No. 40,054; and Luke A. Kilyk, Reg. No. 33,251.